


Assembly instructions 01/2022

TOOLS:


allen key SW4 and SW5 (enclosed), crosstip screwdriver

14 x XS steel dowels		8 x cylinder head screws (M6x80) with flat washers	
14 x connector housings		4 x wooden mounting blocks	
14 x grub screws		4 x flat head screws (M6x60)	
24 x Confirmat screws		1 x center support foot, adjustable	
1 x countersunk screws (M8x60)		3 x distance blocks (100x60x50)	
3 x Spax screws (5x100)			
3 x Spax screws (6x140)			


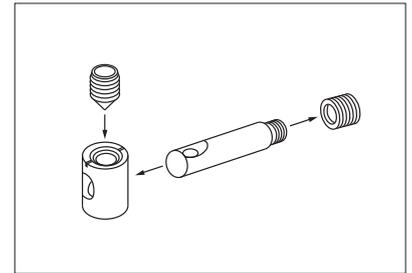


Watch this video for further information on the metal fitting:
<https://www.youtube.com/watch?v=ioIUTDqtvvE>



Please assemble the bed **on a soft surface (e.g. a carpet or blanket)** to avoid damages.

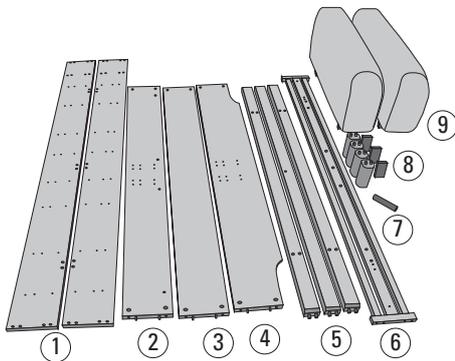


- 1 side rails
- 2 upholstery bar
- 3 headboard
- 4 footboard
- 5 crossbars
- 6 center rail and support bars
- 7 bed and center support feet
- 8 distance blocks
- 9 cushions with mounting blocks

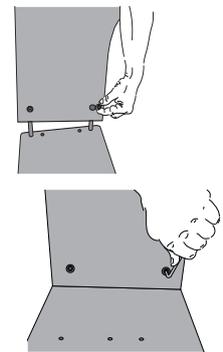

1. Screw XS dowels into side rails (1) and insert the connector housings into the holes. Align dowels and housings correctly! Mount headboard (3) and footboard (4) as well as the upholstery bar (2) to the side rail and fix the connection with grub screws.




2. Place the bed feet (7) on the crossbars (5). Mount the crossbars to the side rail. Fix the center cross bar centre rail (6) using countersunk screw (M8x60) with XS connectors. Mount the second side rail.
3. Mount the adjustable center support foot to the centre rail (6) using countersunk screw (M8x60).
4. Mount the support bars to the side rails using Confirmat screws.

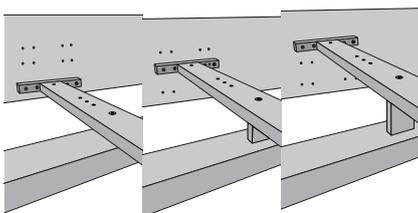


without distance block: insertion depth 16,5 cm
horizontal distance block: insertion depth 10,5 cm
standing distance block: insertion depth 6,5 cm

5. Mount the center rail at the same height as the support bars. Choose the right position of the distance blocks (8) and fix them with Spax screws in the right length (5x100, 6x140).

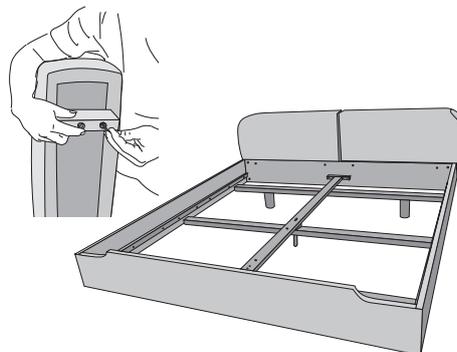

6. Attach the mounting blocks to the bottom of the cushion (9) with cylinder head screws. Insert the cushions between upholstery bar and headboard the soft side of the cushion facing towards the front.

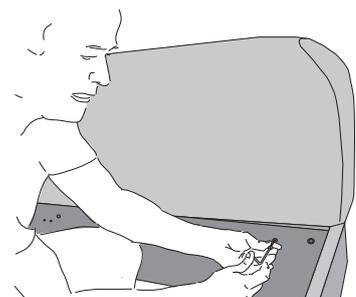

7. Fix the cushions using flat head screws (M6).